



Flexible Termination System (FT-CAP), X7R Dielectric, 6.3 – 250 VDC, VW 80808 Specification

Overview

The KEMET VW80808 Automotive Grade Flexible Termination (FT-CAP) multilayer ceramic capacitors in X7R dielectric are suited for a variety of applications requiring proven, reliable performance in harsh-environment conditions. Whether automotive under hood or in-cabin, these devices emphasize the vital and robust nature of capacitors required for mission and safety of critical automotive subsystems and are compliant with AEC-Q200 and VW80808 specifications.

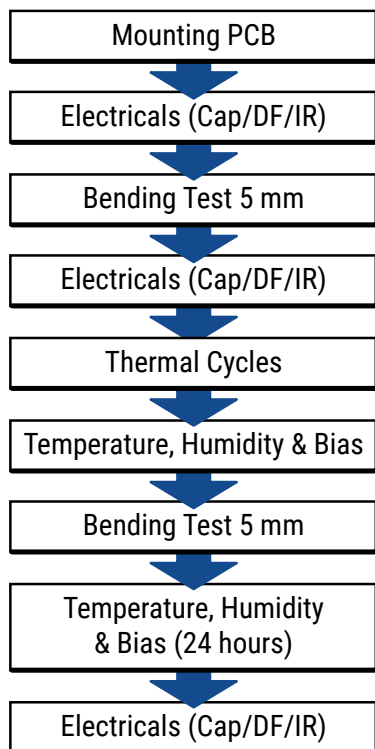

These devices use flexible termination technology that inhibits the transfer of board stress to the rigid ceramic body, therefore mitigating flex cracks, which can result in low IR or short circuit failures. Although this technology does not eliminate the potential for mechanical damage that may propagate during extreme environmental and handling conditions, it does provide superior flex performance over standard termination systems. Combined with the stability of an X7R dielectric and designed to accommodate all capacitance requirements, these flex-robust devices are RoHS-compliant, offer up to 5 mm of flex-bend capability and exhibit a predictable change in capacitance with respect to time and voltage.

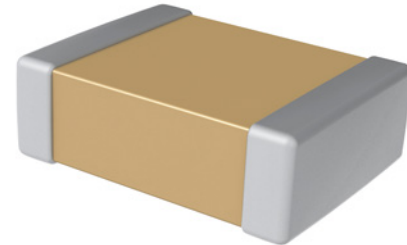

Benefits

- VW 80808 Specification Compliant
- AEC-Q200 automotive qualified.
- Superior flex performance (5 mm)
- DC voltage ratings up to 250 V
- Capacitance offerings ranging from 180 pF – 10 μ F
- Non-polar device, minimizing installation concerns
- Lead (Pb)-Free, RoHS and REACH compliant

Applications


- High current applications (automobile battery line)
- Circuits (direct battery/power connection)
- Control units, sensors, and actuators in motor vehicles
- Filtering (power plane/bus)
- Electronic and Electrical subsystems

Ordering Information

C	1210	X	106	K	8	R	A	C	3316
Ceramic	Case Size (L" x W")	Specification/ Series	Capacitance Code (pF)	Capacitance Tolerance	Rated Voltage (VDC)	Dielectric	Failure Rate/ Design	Termination Finish ¹	Packaging/Grade (C-Spec)
	0603 0805 1206 1210	X = Flexible Termination	Two significant digits and number of zeros	J = ±5% K = ±10% M = ±20%	9 = 6.3 8 = 10 4 = 16 3 = 25 5 = 50 1 = 100 2 = 200 A = 250	R = X7R	A = N/A	C = 100% Matte Sn	3316 = 7" Reel Unmarked (VW80808 & AEC-Q200) 3317 = 13" Reel Unmarked (VW80808 & AEC-Q200)

¹ Additional reeling or packaging options may be available. Contact KEMET for details.

Dimensions – Millimeters (Inches)

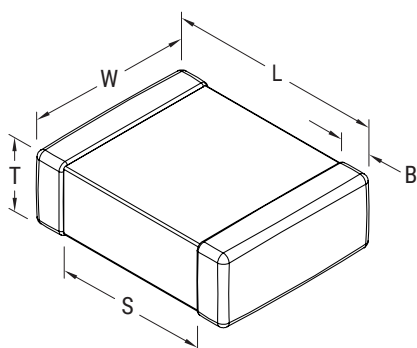

EIA Size Code	Metric Size Code	L Length	W Width	T Thickness	B Bandwidth	S Separation Minimum	Mounting Technique
0603	1608	1.60 (0.063) ±0.17 (0.007)	0.80 (0.032) ±0.15 (0.006)	See Table 2 for Thickness	0.45 (0.018) ±0.15 (0.006)	0.40 (0.016)	Solder wave or solder reflow
0805	2012	2.00 (0.079) ±0.30 (0.012)	1.25 (0.049) ±0.30 (0.012)		0.50 (0.02) ±0.25 (0.010)	0.60 (0.024)	
1206	3216	3.30 (0.130) ±0.40 (0.016)	1.60 (0.063) ±0.35 (0.013)		0.60 (0.024) ±0.25 (0.010)	1.50 (0.060)	
1210	3225	3.30 (0.130) ±0.40 (0.016)	2.60 (0.102) ±0.30 (0.012)		0.60 (0.024) ±0.25 (0.010)	1.50 (0.060)	Solder reflow only

¹ For capacitance values ≥ 0.56 µF add 0.03 (0.001) to length tolerance dimension.

² For capacitance values ≥ 2.7 µF add 0.05 (0.002) to length tolerance dimension.

Qualification/Certification

This product is VW 80808 Specification Compliant and AEC-Q200 automotive qualified. For additional information regarding the Automotive Electronics Council and AEC-Q200, please visit their website at www.aecouncil.com.

Environmental Compliance

Lead (Pb)-free, RoHS, and REACH compliant without exemptions.

Electrical Parameters/Characteristics

Item	Parameters/Characteristics
Operating Temperature Range	-55°C to +125°C
Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC)	±15%
¹ Aging Rate (Maximum % Capacitance Loss/Decade Hour)	3.0%
² Dielectric Withstanding Voltage (DWV)	250% of rated voltage (5 ±1 seconds and charge/discharge not exceeding 50 mA)
³ Dissipation Factor (DF) Maximum Limit at 25°C	See Dissipation Factor Limit Table
⁴ Insulation Resistance (IR) Minimum Limit at 25°C	See Insulation Resistance Limit table (Rated voltage applied for 120 ±5 seconds at 25°C)

¹ Regarding Aging Rate: Capacitance measurements (including tolerance) are indexed to a referee time of 1,000 hours.

² DWV is the voltage a capacitor can withstand (survive) for a short period of time. It exceeds the nominal and continuous working voltage of the capacitor.

³ Capacitance and dissipation factor (DF) measured under the following conditions:

1 kHz ±50 Hz and $1.0 \pm 0.2 V_{rms}$ if capacitance ≤ 10 μF
120 Hz ±10 Hz and $0.5 \pm 0.1 V_{rms}$ if capacitance > 10 μF

⁴ To obtain IR limit, divide MΩ - μF value by the capacitance and compare to GΩ limit. Select the lower of the two limits.

Note: When measuring capacitance it is important to ensure the set voltage level is held constant. The HP4284 and Agilent E4980 have a feature known as Automatic Level Control (ALC). The ALC feature should be switched to "ON."

Post Environmental Limits

High Temperature Life, Biased Humidity, Moisture Resistance					
EIA Case Size	Rated DC Voltage	Capacitance	Dissipation Factor (Maximum %)	Capacitance Shift	Insulation Resistance
X7R	> 25	All ¹	3.0	±20%	10% of Initial Limit
	16/25		5.0		
	< 16		7.5		

¹ For 0805 Capacitance values $\geq 2.2 \mu\text{F}$ DF is 20%..

For 1206 Capacitance values $\geq 4.7 \mu\text{F}$ DF is 20%.

Dissipation Factor Limit Table

Dielectric	Rated DC Voltage	Capacitance Value	Dissipation Factor (Maximum %)
X7R	>25	All ¹	2.5
	16 / 25		3.5
	< 16		5.0

¹ For 0805 Capacitance values $\geq 2.2 \mu\text{F}$ DF is 10%.

For 1206 Capacitance values $\geq 4.7 \mu\text{F}$ DF is 10%.

Insulation Resistance Limit Table

EIA Case Size	Rated DC Voltage	1,000 megohm microfarads or 100 GΩ	500 megohm microfarads or 10 GΩ	100 megohm microfarads or 10 GΩ
0603	< 200 V	< 0.047 μF	$\geq 0.047 \mu\text{F}$	N/A
	$\geq 200 \text{ V}$	< 1.0nF	N/A	$\geq 1.0\text{nF}$
0805	< 200 V	< 0.15 μF	$\geq 0.15 \mu\text{F} < 2.2 \mu\text{f}$	$\geq 2.2 \mu\text{f}$
	$\geq 200 \text{ V}$	< 0.0039 μF	N/A	$\geq 0.0039\mu\text{F}$
1206	< 200 V	< 0.47 μF	$\geq 0.47 \mu\text{F} < 4.7 \mu\text{f}$	$\geq 4.7 \mu\text{f}$
	$\geq 200 \text{ V}$	< 0.012 μF	N/A	$\geq 0.012\mu\text{F}$
1210	< 200 V	< 0.39 μF	$\geq 0.39 \mu\text{F}$	N/A
	$\geq 200 \text{ V}$	< 0.047 μF	N/A	$\geq 0.047\mu\text{F}$

Table 1 – Capacitance Range/Selection Waterfall (0603 – 1210 Case Sizes)

Capacitance (pF)	Cap Code	Case Size/ Series	C0603X								C0805X								C1206X								C1210X							
		Rated Voltage (VDC)	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250
		Voltage Code	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A
180pF	181	Capacitance Tolerances: J = ±5% K = ±10% M = ±20%	CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG																
220pF	221		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG																
270pF	271		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG																
330pF	331		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG																
390pF	391		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG																
470pF	471		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG																
560pF	561		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG																
680pF	681		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG																
820pF	821		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG																
1.0 nF	102		CJ	CJ	CJ	CJ	CJ	CJ	CG	CG	DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU								
1.2 nF	122		CJ	CJ	CJ	CJ	CJ	CJ	CG	CG	DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU								
1.5 nF	152		CJ	CJ	CJ	CJ	CJ	CJ	CG	CG	DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU								
1.8 nF	182		CJ	CJ	CJ	CJ	CJ	CJ	CG	CG	DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU								
2.2 nF	222		CJ	CJ	CJ	CJ	CJ	CJ	CG	CG	DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU	FN	FN	FN	FN	FN	FN	FM	FM
2.7 nF	272		CJ	CJ	CJ	CJ	CJ	CJ	CG	CG	DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU	FN	FN	FN	FN	FN	FN	FM	FM
3.3 nF	332		CJ	CJ	CJ	CJ	CJ	CJ	CG	CG	DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU	FN	FN	FN	FN	FN	FN	FM	FM
3.9 nF	392		CJ	CJ	CJ	CJ	CJ	CJ	CG	CG	DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU	FN	FN	FN	FN	FN	FN	FM	FM
4.7 nF	472		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU	FN	FN	FN	FN	FN	FN	FM	FM
5.6 nF	562		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU	FN	FN	FN	FN	FN	FN	FM	FM
6.8 nF	682		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU	FN	FN	FN	FN	FN	FN	FM	FM
8.2 nF	822		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU	FN	FN	FN	FN	FN	FN	FM	FM
10 nF	103		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EU	EU	FN	FN	FN	FN	FN	FN	FM	FM
12 nF	123		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EJ	EJ	FN	FN	FN	FN	FN	FN	FM	FM
15 nF	153		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EJ	EJ	FN	FN	FN	FN	FN	FN	FM	FM
18 nF	183		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EJ	EJ	FN	FN	FN	FN	FN	FN	FM	FM
22 nF	223		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EJ	EJ	FN	FN	FN	FN	FN	FN	FM	FM
27 nF	273		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EJ	EJ	FN	FN	FN	FN	FN	FN	FM	FM
33 nF	333		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EJ	EJ	FN	FN	FN	FN	FN	FN	FM	FM
39 nF	393		CJ	CJ	CJ	CJ	CJ	CJ			DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EJ	EJ	FN	FN	FN	FN	FN	FN	FM	FM
47 nF	473		CJ	CJ	CJ	CJ	CJ				DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	ES	ES	FN	FN	FN	FN	FN	FQ	FK	FK
56 nF	563		CJ	CJ	CJ	CJ	CJ				DD	DD	DD	DD	DD	DD	DD	DG	EQ	EQ	EQ	EQ	EQ	EQ	ES	ES	FN	FN	FN	FN	FN	FQ	FK	FK
68 nF	683		CJ	CJ	CJ	CJ	CJ				DD	DD	DD	DD	DD	DD	DD	DG	EQ	EQ	EQ	EQ	EQ	EQ	ES	ES	FN	FN	FN	FN	FN	FQ	FK	FK
82 nF	823		CJ	CJ	CJ	CJ	CJ				DD	DD	DD	DD	DD	DD	DD	DG	EQ	EQ	EQ	EQ	EQ	EQ	ES	ES	FN	FN	FN	FN	FN	FQ	FK	FK
100 nF	104		CJ	CJ	CJ	CJ	CJ				DR	DR	DR	DR	DR	DR	DR	DG	EQ	EQ	EQ	EQ	EQ	EQ	EM	EM	FN	FN	FN	FN	FN	FZ	FS	FS
120 nF	124		CJ	CJ	CJ	CJ					DD	DD	DD	DD	DD	DD	DD	DG	ER	ER	ER	ER	ER	ER	EU	EU	FN	FN	FN	FN	FN	FZ	FS	FS
150 nF	154		CJ	CJ	CJ	CJ					DD	DD	DD	DD	DD	DD	DD	DG	ER	ER	ER	ER	ER	ER	EU	EU	FQ	FQ	FQ	FQ	FQ	FM	FM	FM
180 nF	184		CJ	CJ	CJ						DD	DD	DD	DD	DD	DD	DD	DG	ER	ER	ER	ER	ER	ER	ER	ER	FQ	FQ	FQ	FQ	FQ	FM	FM	FM
220 nF	224										DD	DD	DD	DD	DD	DD	DD	DG	ER	ER	ER	ER	ER	ER	ER	ER	FQ	FQ	FQ	FQ	FQ	FM	FM	FM
270 nF	274										DD	DD	DD	DD	DD	DD	DD	DG	ER	ER	ER	ER	ER	ER	ER	ER	FQ	FQ	FQ	FQ	FQ	FM	FM	FM
330 nF	334										DD	DD	DD	DD	DD	DD	DD	DG	ER	ER	ER	ER	EM	EM	EM	EM	FQ	FQ	FQ	FQ	FQ	FM	FM	FM
390 nF	394										DS	DS	DS	DS	DS			DG	ER	ER	ER	ER	ER	EU	EU		FX	FX	FX	FX	FX	FX	FX	FX
470 nF	474										DS	DS	DS	DS	DS			DG	ER	ER	ER	ER	ER	EU	EU		FX	FX	FX	FX	FX	FX	FX	FX
560 nF	564										DG	DG	DG	DG				DG	ER	ER	ER	ER	ER				FX	FX	FX	FX	FA	FA	FA	FA
680 nF	684										DG	DG	DG	DG				DG	ES	ES	ES	ES	ES				FX	FX	FX	FX	FZ	FZ	FZ	FZ
820 nF	824										DG	DG	DG	DG				DG	ES	ES	ES	ES	ES				FA	FA	FA	FA	FL	FL	FL	FL
1.0 µF	105										DG	DG						DG	ES	ES	ES	ES	ES				FU	FU	FU	FU	FM	FM		
1.2 µF	125										DS	DS						DG	EH	EH	EH	EH	EH				FZ	FZ	FZ	FZ	FZ			
1.5 µF	155										DG	DG						DG	EH	EH	EH	EH	EH				FZ	FZ	FZ	FZ	FZ			
Capacitance (pF)	Cap Code	Voltage Code	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A
		Rated Voltage (VDC)	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250
		Case Size/ Series	C0603X								C0805X								C1206X								C1210X							

For an extended AEC-Q200 flexible termination offering please visit: https://content.kemet.com/datasheets/KEM_C1078_X7R_FT-CAP_AUTO_SMD.pdf

Table 1 – Capacitance Range/Selection Waterfall (0603 – 1210 Case Sizes) cont.

Capacitance (pF)	Cap Code	Case Size/ Series	C0603X								C0805X								C1206X								C1210X							
		Rated Voltage (VDC)	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250
		Voltage Code	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A
1.8 μF	185																	EH	EH	EH	EH	EH				FZ	FZ	FZ	FZ	FZ				
2.2 μF	225																	EH	EH	EH	EH	EH				FZ	FZ	FZ	FZ	FZ				
2.7 μF	275																	EH	EH	EH						FZ	FZ	FZ	FU	FU				
3.3 μF	335																	EH	EH	EH						FM	FM	FM	FM	FM				
3.9 μF	395																	EH	EH	EH						FM	FM	FM	FM	FM				
4.7 μF	475																		EA	EA	EA	EA	EA				FK	FK	FK	FK	FK			
5.6 μF	565																										FS	FS	FS	FS	FS			
6.8 μF	685																										FU	FU	FU					
8.2 μF	825																										FM	FM	FM					
10 μF	106											DT	DT														FK	FK						
Capacitance (pF)	Cap Code	Voltage Code	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A	9	8	4	3	5	1	2	A
		Rated Voltage (VDC)	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250	6.3	10	16	25	50	100	200	250
		Case Size/Series	C0603X								C0805X								C1206X								C1210X							

For an extended AEC-Q200 flexible termination offering please visit: https://content.kemet.com/datasheets/KEM_C1078_X7R_FT-CAP_AUTO_SMD.pdf

Table 2 – Chip Thickness/Tape & Reel Packaging Quantities

Thickness Code	Case Size	Thickness $\pm$ Range (mm)	Paper Quantity		Plastic Quantity	
			7" Reel	13" Reel	7" Reel	13" Reel
CG	0603	0.80 $\pm$ 0.10	4,000	15,000	0	0
CJ	0603	0.80 $\pm$ 0.15	4,000	15,000	0	0
DR	0805	0.78 $\pm$ 0.20	0	0	4,000	10,000
DD	0805	0.90 $\pm$ 0.10	0	0	4,000	10,000
DS	0805	1.00 $\pm$ 0.20	0	0	2,500	10,000
DG	0805	1.25 $\pm$ 0.15	0	0	2,500	10,000
DT	0805	1.25 $\pm$ 0.25	0	0	2,500	10,000
EQ	1206	0.78 $\pm$ 0.20	0	0	4,000	10,000
ER	1206	0.90 $\pm$ 0.20	0	0	4,000	10,000
ES	1206	1.00 $\pm$ 0.20	0	0	2,500	10,000
EF	1206	1.20 $\pm$ 0.15	0	0	2,500	10,000
EM	1206	1.25 $\pm$ 0.15	0	0	2,500	10,000
EH	1206	1.60 $\pm$ 0.20	0	0	2,000	8,000
EU	1206	1.60 $\pm$ 0.25	0	0	2,000	8,000
EA	1206	1.60 $\pm$ 0.35	0	0	2,000	8,000
EJ	1206	1.70 $\pm$ 0.20	0	0	2,000	8,000
FN	1210	0.78 $\pm$ 0.20	0	0	4,000	10,000
FQ	1210	0.90 $\pm$ 0.20	0	0	4,000	10,000
FX	1210	0.95 $\pm$ 0.20	0	0	4,000	10,000
FA	1210	1.10 $\pm$ 0.15	0	0	2,500	10,000
FZ	1210	1.25 $\pm$ 0.20	0	0	2,500	10,000
FL	1210	1.40 $\pm$ 0.15	0	0	2,000	8,000
FU	1210	1.55 $\pm$ 0.20	0	0	2,000	8,000
FM	1210	1.70 $\pm$ 0.20	0	0	2,000	8,000
FK	1210	2.10 $\pm$ 0.20	0	0	2,000	8,000
FS	1210	2.50 $\pm$ 0.30	0	0	1,000	4,000
FK	1210	2.10 $\pm$ 0.20	0	0	2,000	8,000
FS	1210	2.50 $\pm$ 0.30	0	0	1,000	4,000
Thickness Code	Case Size	Thickness $\pm$ Range (mm)	7" Reel	13" Reel	7" Reel	13" Reel
			Paper Quantity ¹		Plastic Quantity	

Table 3 – Chip Capacitor Land Pattern Design Recommendations per IPC–7351


EIA Size Code	Metric Size Code	Density Level A: Maximum (Most) Land Protrusion (mm)					Density Level B: Median (Nominal) Land Protrusion (mm)					Density Level C: Minimum (Least) Land Protrusion (mm)				
		C	Y	X	V1	V2	C	Y	X	V1	V2	C	Y	X	V1	V2
0603	1608	0.85	1.25	1.10	4.00	2.10	0.75	1.05	1.00	3.10	1.50	0.65	0.85	0.90	2.40	1.20
0805	2012	0.99	1.44	1.66	4.47	2.71	0.89	1.24	1.56	3.57	2.11	0.79	1.04	1.46	2.42	1.81
1206	3216	1.59	1.62	2.06	5.85	3.06	1.49	1.42	1.96	4.95	2.46	1.39	1.22	1.86	4.25	2.16
1210	3225	1.59	1.62	3.01	5.90	4.01	1.49	1.42	2.91	4.95	3.41	1.39	1.22	2.81	4.25	3.11
1808	4520	2.30	1.75	2.30	7.40	3.30	2.20	1.55	2.20	6.50	2.70	2.10	1.35	2.10	5.80	2.40
1812	4532	2.10	1.80	3.60	7.00	4.60	2.00	1.60	3.50	6.10	4.00	1.90	1.40	3.40	5.40	3.70
1825	4564	2.15	1.80	6.90	7.10	7.90	2.05	1.60	6.80	6.20	7.30	1.95	1.40	6.70	5.50	7.00
2220	5650	2.85	2.10	5.50	8.80	6.50	2.75	1.90	5.40	7.90	5.90	2.65	1.70	5.30	7.20	5.60
2225	5664	2.85	2.10	6.90	8.80	7.90	2.75	1.90	6.80	7.90	7.30	2.65	1.70	6.70	7.20	7.00

Density Level A: For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes. KEMET only recommends wave soldering of EIA 0603, 0805 and 1206 case sizes.

Density Level B: For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes.

Density Level C: For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC Standard 7351 (IPC–7351).

Image below based on Density Level B for an EIA 1210 case size.

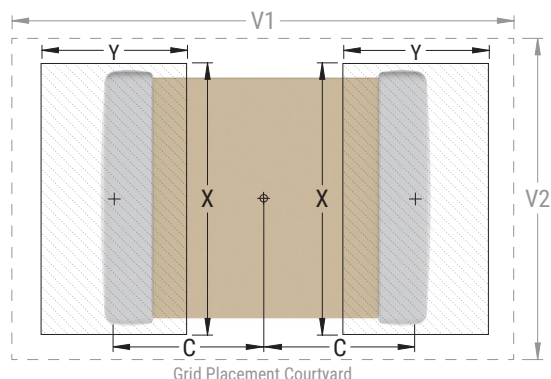

Soldering Process

Recommended Soldering Technique:


- Solder wave or solder reflow for EIA case sizes 0603, 0805 and 1206
- All other EIA case sizes are limited to solder reflow only

Recommended Reflow Soldering Profile:

KEMET's families of surface mount multilayer ceramic capacitors (SMD MLCCs) are compatible with wave (single or dual), convection, IR or vapor phase reflow techniques. Preheating of these components is recommended to avoid extreme thermal stress. KEMET's recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/J-STD-020 standard for moisture sensitivity testing. These devices can safely withstand a maximum of three reflow passes at these conditions.

Profile Feature	Termination Finish	
	SnPb	100% Matte Sn
Preheat/Soak		
Temperature Minimum (T_{Smin})	100°C	150°C
Temperature Maximum (T_{Smax})	150°C	200°C
Time (t_s) from T_{Smin} to T_{Smax}	60 – 120 seconds	60 – 120 seconds
Ramp-Up Rate (T_L to T_P)	3°C/second maximum	3°C/second maximum
Liquidous Temperature (T_L)	183°C	217°C
Time Above Liquidous (t_L)	60 – 150 seconds	60 – 150 seconds
Peak Temperature (T_P)	235°C	260°C
Time Within 5°C of Maximum Peak Temperature (t_p)	20 seconds maximum	30 seconds maximum
Ramp-Down Rate (T_P to T_L)	6°C/second maximum	6°C/second maximum
Time 25°C to Peak Temperature	6 minutes maximum	8 minutes maximum


Note: All temperatures refer to the center of the package, measured on the capacitor body surface that is facing up during assembly reflow.

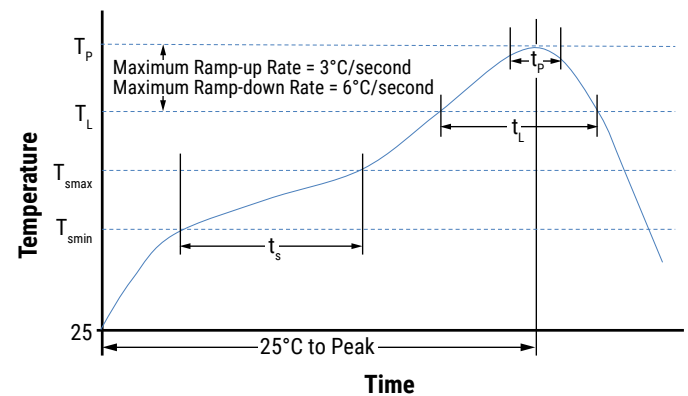

Storage and Handling

Ceramic chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature – reels may soften or warp and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 70% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts and atmospheres should be free of chlorine and sulfur bearing compounds. For optimized solderability chip stock should be used promptly, preferably within 1.5 years of receipt.

Construction

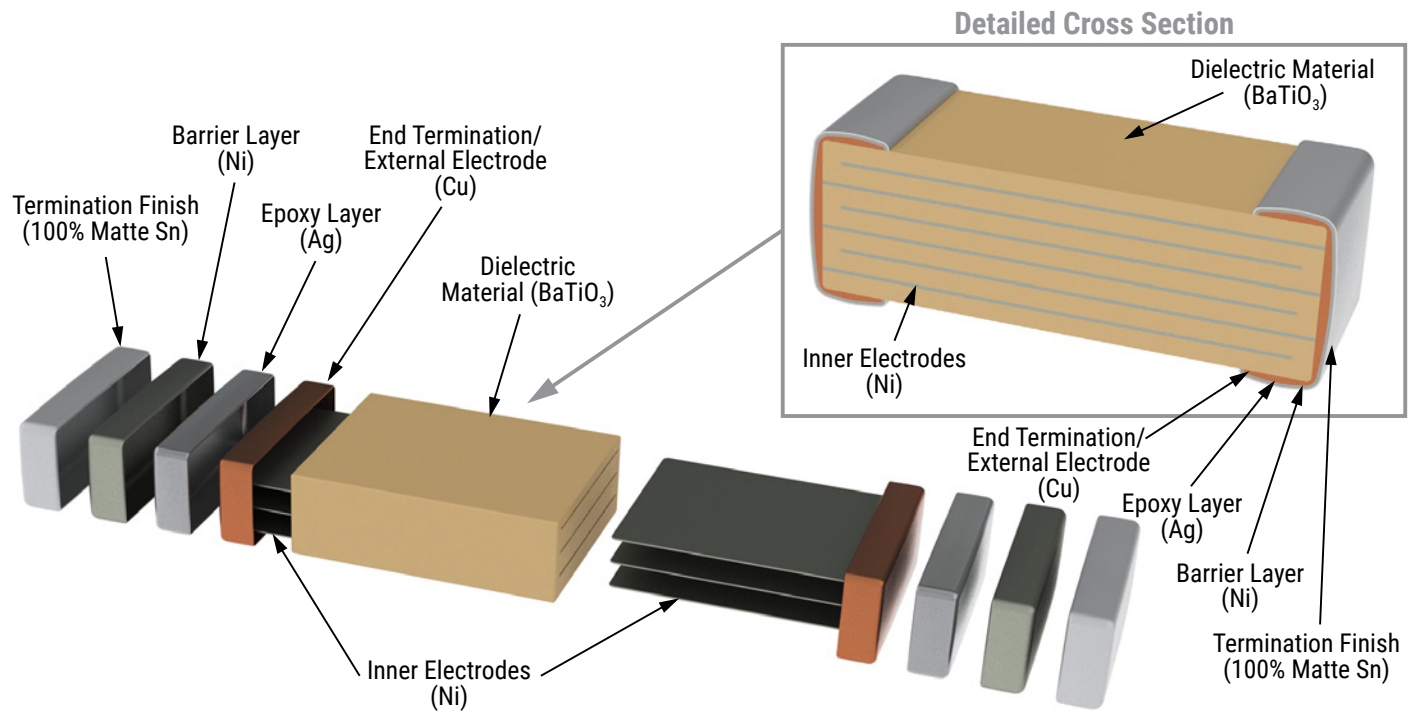


Capacitor Marking (Optional)

These surface mount multilayer ceramic capacitors are normally supplied unmarked. If required, they can be marked as an extra cost option. Marking is available on most KEMET devices, but must be requested using the correct ordering code identifier(s). If this option is requested, two sides of the ceramic body will be laser marked with a “K” to identify KEMET, followed by two characters (per EIA-198 - see table below) to identify the capacitance value. EIA 0603 case size devices are limited to the “K” character only.

Laser marking option is not available on:

- C0G, ultra stable X8R and Y5V dielectric devices.
- EIA 0402 case size devices.
- EIA 0603 case size devices with flexible termination option.
- KPS commercial and automotive grade stacked devices.
- X7R dielectric products in capacitance values outlined below.

Marking appears in legible contrast. Illustrated below is an example of an MLCC with laser marking of “KA8”, which designates a KEMET device with rated capacitance of 100 μ F. Orientation of marking is vendor optional.

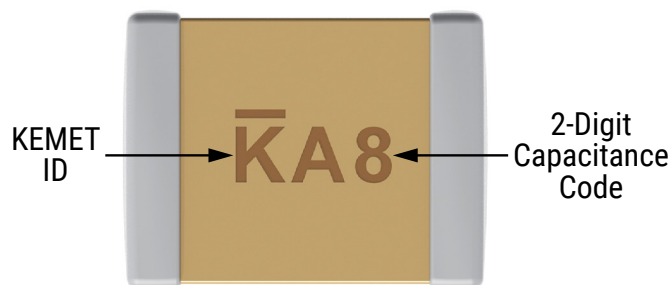

EIA Case Size	Metric Size Code	Capacitance
0603	1608	≤ 170 pF
0805	2012	≤ 150 pF
1206	3216	≤ 910 pF
1210	3225	$\leq 2,000$ pF
1808	4520	$\leq 3,900$ pF
1812	4532	$\leq 6,700$ pF
1825	4564	≤ 0.018 μ F
2220	5650	≤ 0.027 μ F
2225	5664	≤ 0.033 μ F

Capacitor Marking (Optional) cont.

Capacitance (pF) For Various Alpha/Numeral Identifiers										
Alpha Character	Numeral									
	9	0	1	2	3	4	5	6	7	8
Capacitance (pF)										
A	0.10	1.0	10	100	1,000	10,000	100,000	1,000,000	10,000,000	100,000,000
B	0.11	1.1	11	110	1,100	11,000	110,000	1,100,000	11,000,000	110,000,000
C	0.12	1.2	12	120	1,200	12,000	120,000	1,200,000	12,000,000	120,000,000
D	0.13	1.3	13	130	1,300	13,000	130,000	1,300,000	13,000,000	130,000,000
E	0.15	1.5	15	150	1,500	15,000	150,000	1,500,000	15,000,000	150,000,000
F	0.16	1.6	16	160	1,600	16,000	160,000	1,600,000	16,000,000	160,000,000
G	0.18	1.8	18	180	1,800	18,000	180,000	1,800,000	18,000,000	180,000,000
H	0.20	2.0	20	200	2,000	20,000	200,000	2,000,000	20,000,000	200,000,000
J	0.22	2.2	22	220	2,200	22,000	220,000	2,200,000	22,000,000	220,000,000
K	0.24	2.4	24	240	2,400	24,000	240,000	2,400,000	24,000,000	240,000,000
L	0.27	2.7	27	270	2,700	27,000	270,000	2,700,000	27,000,000	270,000,000
M	0.30	3.0	30	300	3,000	30,000	300,000	3,000,000	30,000,000	300,000,000
N	0.33	3.3	33	330	3,300	33,000	330,000	3,300,000	33,000,000	330,000,000
P	0.36	3.6	36	360	3,600	36,000	360,000	3,600,000	36,000,000	360,000,000
Q	0.39	3.9	39	390	3,900	39,000	390,000	3,900,000	39,000,000	390,000,000
R	0.43	4.3	43	430	4,300	43,000	430,000	4,300,000	43,000,000	430,000,000
S	0.47	4.7	47	470	4,700	47,000	470,000	4,700,000	47,000,000	470,000,000
T	0.51	5.1	51	510	5,100	51,000	510,000	5,100,000	51,000,000	510,000,000
U	0.56	5.6	56	560	5,600	56,000	560,000	5,600,000	56,000,000	560,000,000
V	0.62	6.2	62	620	6,200	62,000	620,000	6,200,000	62,000,000	620,000,000
W	0.68	6.8	68	680	6,800	68,000	680,000	6,800,000	68,000,000	680,000,000
X	0.75	7.5	75	750	7,500	75,000	750,000	7,500,000	75,000,000	750,000,000
Y	0.82	8.2	82	820	8,200	82,000	820,000	8,200,000	82,000,000	820,000,000
Z	0.91	9.1	91	910	9,100	91,000	910,000	9,100,000	91,000,000	910,000,000
a	0.25	2.5	25	250	2,500	25,000	250,000	2,500,000	25,000,000	250,000,000
b	0.35	3.5	35	350	3,500	35,000	350,000	3,500,000	35,000,000	350,000,000
d	0.40	4.0	40	400	4,000	40,000	400,000	4,000,000	40,000,000	400,000,000
e	0.45	4.5	45	450	4,500	45,000	450,000	4,500,000	45,000,000	450,000,000
f	0.50	5.0	50	500	5,000	50,000	500,000	5,000,000	50,000,000	500,000,000
m	0.60	6.0	60	600	6,000	60,000	600,000	6,000,000	60,000,000	600,000,000
n	0.70	7.0	70	700	7,000	70,000	700,000	7,000,000	70,000,000	700,000,000
t	0.80	8.0	80	800	8,000	80,000	800,000	8,000,000	80,000,000	800,000,000
y	0.90	9.0	90	900	9,000	90,000	900,000	9,000,000	90,000,000	900,000,000

Tape & Reel Packaging Information

KEMET offers multilayer ceramic chip capacitors packaged in 8, 12 and 16 mm tape on 7" and 13" reels in accordance with EIA Standard 481. This packaging system is compatible with all tape-fed automatic pick and place systems. See Table 2 for details on reeling quantities for commercial chips.

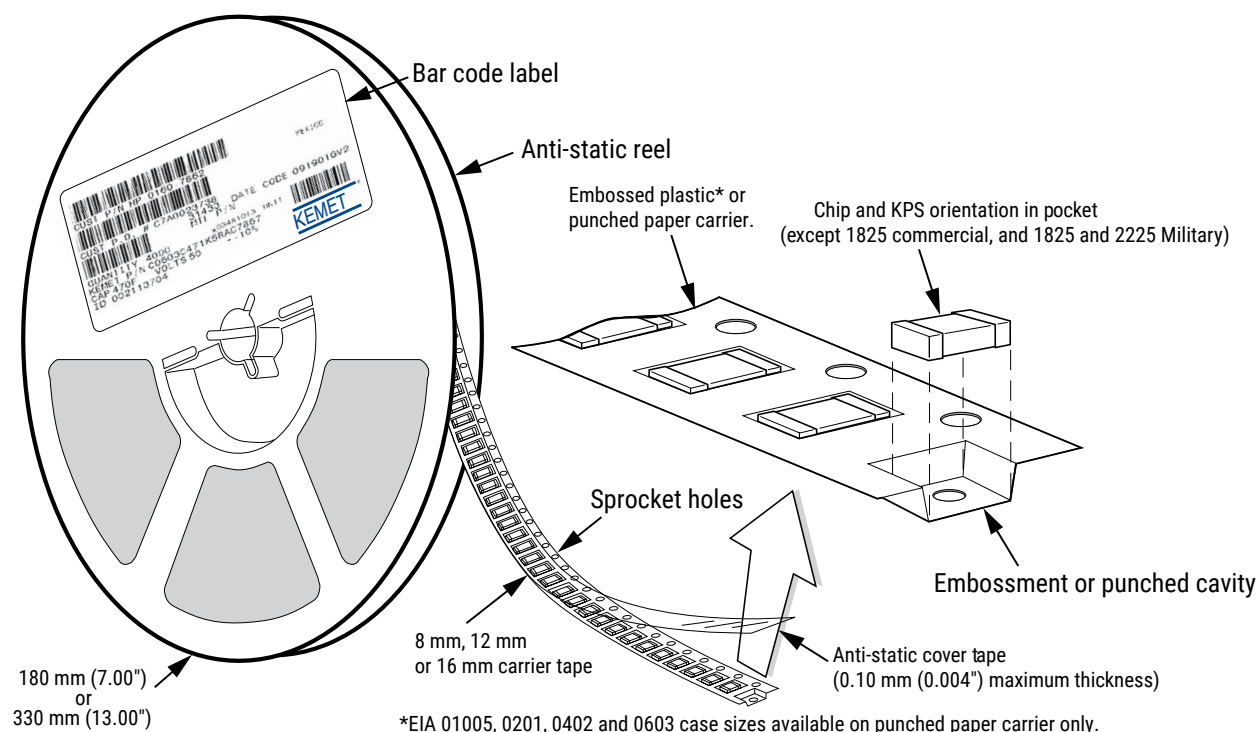


Table 4 – Carrier Tape Configuration, Embossed Plastic & Punched Paper (mm)

EIA Case Size	Tape Size (W)*	Embossed Plastic		Punched Paper	
		7" Reel	13" Reel	7" Reel	13" Reel
		Pitch (P ₁)*		Pitch (P ₁)*	
01005 – 0402	8			2	2
0603	8			4	4
0805	8	4	4	4	4
1206 – 1210	8	4	4	4	4
1805 – 1808	12	4	4		
≥ 1812	12	8	8		
KPS 1210	12	8	8		
KPS 1812 and 2220	16	12	12		
Array 0612	8	4	4		

*Refer to Figures 1 and 2 for W and P₁ carrier tape reference locations.

*Refer to Tables 5 and 6 for tolerance specifications.

Figure 1 – Embossed (Plastic) Carrier Tape Dimensions

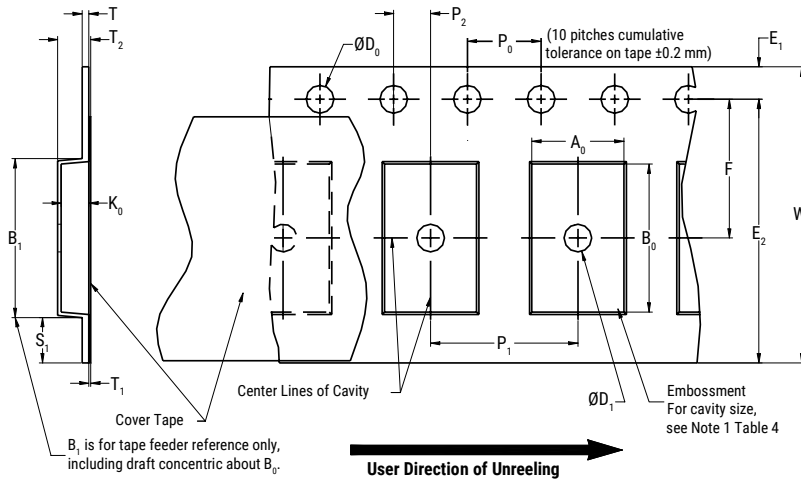


Table 5 – Embossed (Plastic) Carrier Tape Dimensions
Metric will govern

Constant Dimensions – Millimeters (Inches)									
Tape Size	D ₀	D ₁ Minimum Note 1	E ₁	P ₀	P ₂	R Reference Note 2	S ₁ Minimum Note 3	T Maximum	T ₁ Maximum
8 mm	1.5 +0.10/-0.0 (0.059 +0.004/-0.0)	1.0 (0.039)	1.75 ±0.10 (0.069 ±0.004)	4.0 ±0.10 (0.157 ±0.004)	2.0 ±0.05 (0.079 ±0.002)	25.0 (0.984)	0.600 (0.024)	0.600 (0.024)	0.100 (0.004)
12 mm		1.5 (0.059)				30 (1.181)			
16 mm									
24 mm	1.5 +0.10/-0.0 (0.059 +0.004/-0.0)	1.5 (0.059)	1.75 ±0.10 (0.069 ±0.004)	4.0 ±0.10 (0.157 ±0.004)	2.0 ±0.10 (0.078 ±0.003)	30 (1.181)	5 (0.196)	0.250 (0.009)	0.350 (0.013)
Variable Dimensions – Millimeters (Inches)									
Tape Size	Pitch	B ₁ Maximum Note 4	E ₂ Minimum	F	P ₁	T ₂ Maximum	W Maximum	A ₀ , B ₀ & K ₀	
8 mm	Single (4 mm)	4.35 (0.171)	6.25 (0.246)	3.5 ±0.05 (0.138 ±0.002)	4.0 ±0.10 (0.157 ±0.004)	2.5 (0.098)	8.3 (0.327)	Note 5	
12 mm	Single (4 mm) and Double (8 mm)	8.2 (0.323)	10.25 (0.404)	5.5 ±0.05 (0.217 ±0.002)	8.0 ±0.10 (0.315 ±0.004)	4.6 (0.181)	12.3 (0.484)		
16 mm	Triple (12 mm)	12.1 (0.476)	14.25 (0.561)	7.5 ±0.05 (0.138 ±0.002)	12.0 ±0.10 (0.157 ±0.004)	4.6 (0.181)	16.3 (0.642)		
24 mm	16 mm	11.5 (0.452)	22.25 (0.875)	11.5 ±0.10 (0.452 ±0.003)	16.0 ±0.10 (0.629 ±0.004)	3 (0.118)	24.3 (0.956)		

1. The embossment hole location shall be measured from the sprocket hole controlling the location of the embossment. Dimensions of embossment location and hole location shall be applied independent of each other.
2. The tape with or without components shall pass around R without damage (see Figure 6).
3. If S₁ < 1.0 mm, there may not be enough area for cover tape to be properly applied (see EIA Standard 481 paragraph 4.3 section b).
4. B₁ dimension is a reference dimension for tape feeder clearance only.
5. The cavity defined by A₀, B₀ and K₀ shall surround the component with sufficient clearance that:
 - (a) the component does not protrude above the top surface of the carrier tape.
 - (b) the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
 - (c) rotation of the component is limited to 20° maximum for 8 and 12 mm tapes and 10° maximum for 16 mm tapes (see Figure 3).
 - (d) lateral movement of the component is restricted to 0.5 mm maximum for 8 and 12 mm wide tape and to 1.0 mm maximum for 16 mm tape (see Figure 4).
 - (e) for KPS product, A₀ and B₀ are measured on a plane 0.3 mm above the bottom of the pocket.
 - (f) see addendum in EIA Standard 481 for standards relating to more precise taping requirements.

Figure 2 – Punched (Paper) Carrier Tape Dimensions

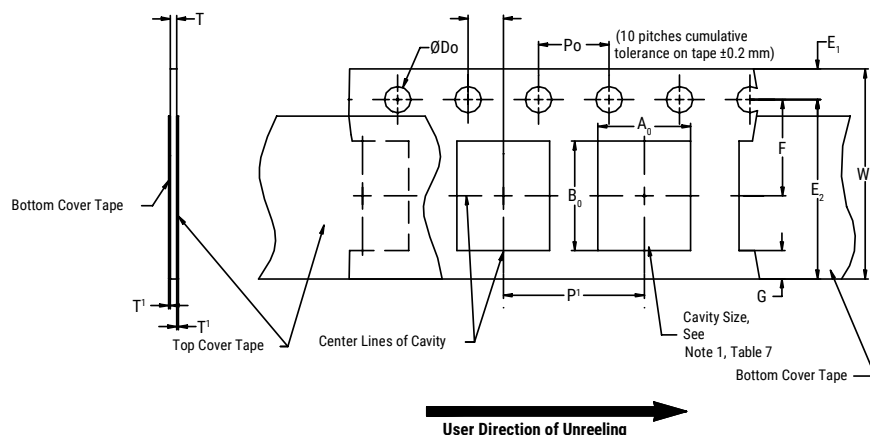


Table 6 – Punched (Paper) Carrier Tape Dimensions

Metric will govern

Constant Dimensions – Millimeters (Inches)							
Tape Size	D ₀	E ₁	P ₀	P ₂	T ₁ Maximum	G Minimum	R Reference Note 2
8 mm	1.5 +0.10 -0.0 (0.059 +0.004 -0.0)	1.75 ±0.10 (0.069 ±0.004)	4.0 ±0.10 (0.157 ±0.004)	2.0 ±0.05 (0.079 ±0.002)	0.10 (0.004) Maximum	0.75 (0.030)	25 (0.984)
Variable Dimensions – Millimeters (Inches)							
Tape Size	Pitch	E2 Minimum	F	P ₁	T Maximum	W Maximum	A ₀ B ₀
8 mm	Half (2 mm)	6.25 (0.246)	3.5 ±0.05 (0.138 ±0.002)	2.0 ±0.05 (0.079 ±0.002)	1.1 (0.098)	8.3 (0.327)	Note 1
8 mm	Single (4 mm)			4.0 ±0.10 (0.157 ±0.004)		8.3 (0.327)	

- The cavity defined by A₀, B₀ and T shall surround the component with sufficient clearance that:
 - the component does not protrude beyond either surface of the carrier tape.
 - the component can be removed from the cavity in a vertical direction without mechanical restriction, after the top cover tape has been removed.
 - rotation of the component is limited to 20° maximum (see Figure 3).
 - lateral movement of the component is restricted to 0.5 mm maximum (see Figure 4).
 - see addendum in EIA Standard 481 for standards relating to more precise taping requirements.
- The tape with or without components shall pass around R without damage (see Figure 6).

Packaging Information Performance Notes

- 1. Cover Tape Break Force:** 1.0 kg minimum.
- 2. Cover Tape Peel Strength:** The total peel strength of the cover tape from the carrier tape shall be:

Tape Width	Peel Strength
8 mm	0.1 to 1.0 Newton (10 to 100 gf)
12 and 16 mm	0.1 to 1.3 Newton (10 to 130 gf)

The direction of the pull shall be opposite the direction of the carrier tape travel. The pull angle of the carrier tape shall be 165° to 180° from the plane of the carrier tape. During peeling, the carrier and/or cover tape shall be pulled at a velocity of 300 ±10 mm/minute.

- 3. Labeling:** Bar code labeling (standard or custom) shall be on the side of the reel opposite the sprocket holes. Refer to EIA Standards 556 and 624.

Figure 3 – Maximum Component Rotation

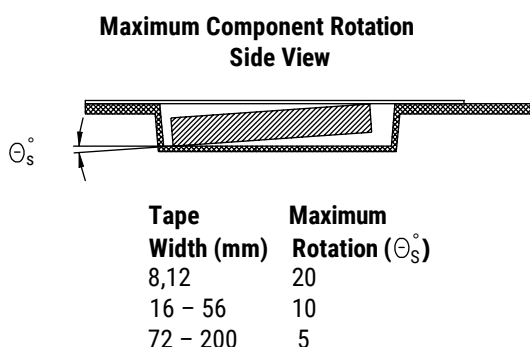
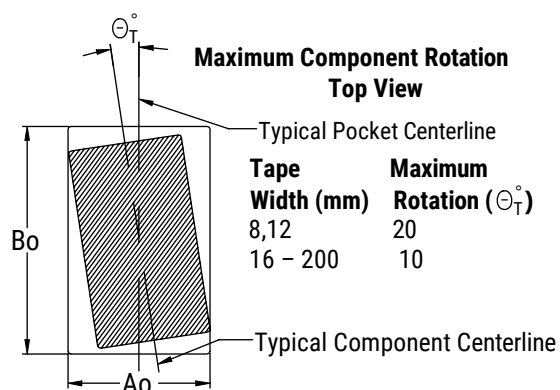


Figure 4 – Maximum Lateral Movement

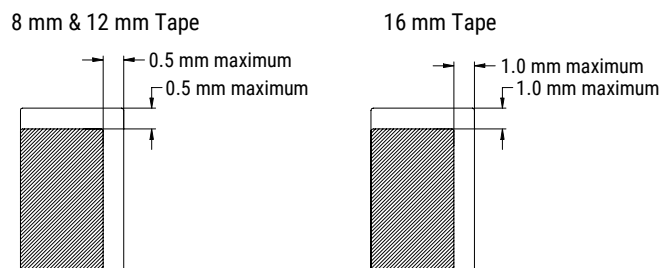


Figure 5 – Bending Radius


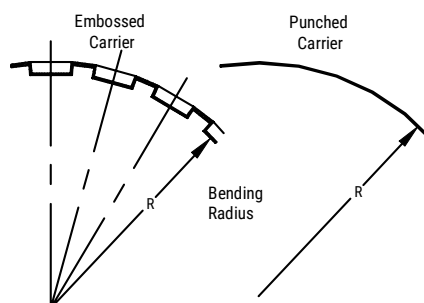


Figure 6 – Reel Dimensions

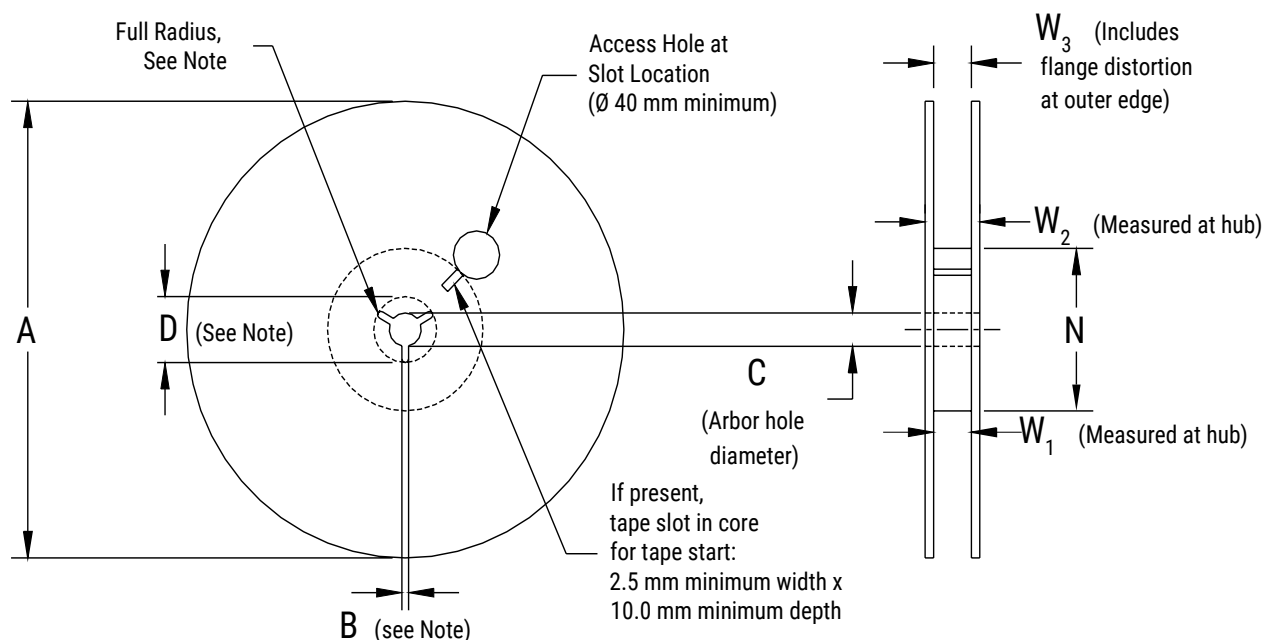

Note: Drive spokes optional; if used, dimensions B and D shall apply.

Table 7 – Reel Dimensions

Metric will govern

Constant Dimensions – Millimeters (Inches)				
Tape Size	A	B Minimum	C	D Minimum
8 mm	178 ±0.20 (7.008 ±0.008) or 330 ±0.20 (13.000 ±0.008)	1.5 (0.059)	13.0 +0.5/-0.2 (0.521 +0.02/-0.008)	20.2 (0.795)
12 mm				
16 mm		1.2 (0.047)	13.0 ±0.2 (0.521 ±0.008)	21 (0.826)
24 mm				
Variable Dimensions – Millimeters (Inches)				
Tape Size	N Minimum	W ₁	W ₂ Maximum	W ₃
8 mm	50 (1.969)	8.4 +1.5/-0.0 (0.331 +0.059/-0.0)	14.4 (0.567)	Shall accommodate tape width without interference
12 mm		12.4 +2.0/-0.0 (0.488 +0.078/-0.0)	18.4 (0.724)	
16 mm		16.4 +2.0/-0.0 (0.646 +0.078/-0.0)	22.4 (0.882)	
24 mm		25 +1.0/-0.0 (0.984 +0.039/-0.0)	27.4 ±1.0 (1.078 ±0.039)	

Figure 7 – Tape Leader & Trailer Dimensions


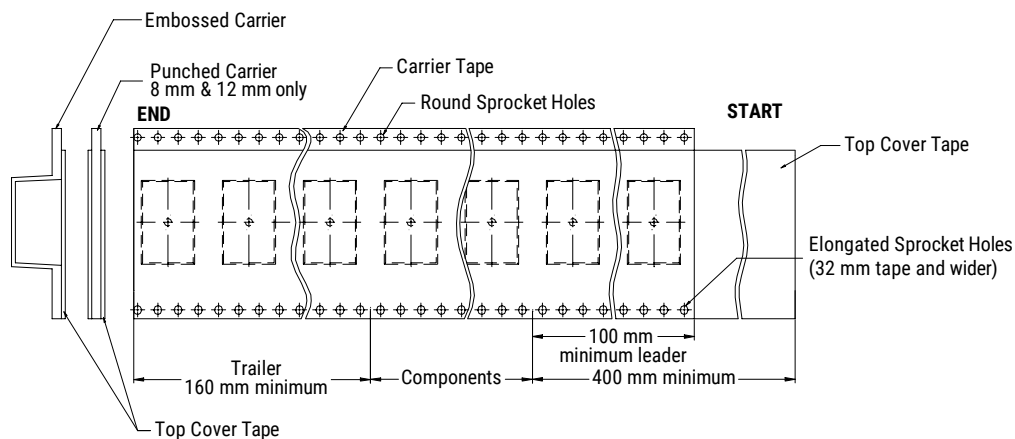


Figure 8 – Maximum Camber

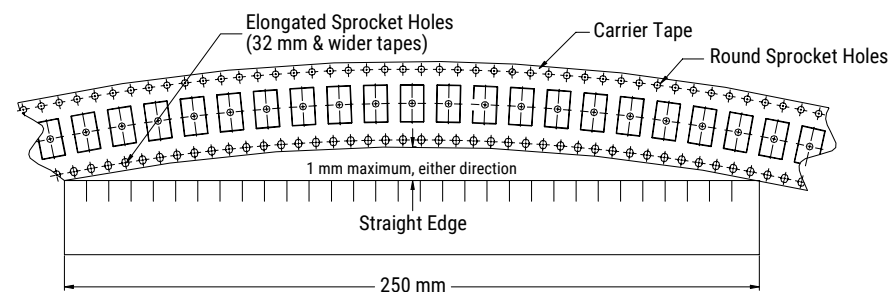

KEMET Electronics Corporation Sales Offices

For a complete list of our global sales offices, please visit www.kemet.com/sales.

Disclaimer

YAGEO Corporation and its affiliates do not recommend the use of commercial or automotive grade products for high reliability applications or manned space flight.

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KEMET:

C0805X104K3RAC3316	C0805X473K5RAC3316	C0805X474K3RAC3316	C0805X223K5RAC3316
C0805X102K1RAC3316	C0805X103K5RAC3316	C0805X102K5RAC3316	C1206X104K1RAC3316
C0805X222K5RAC3316	C1206X105K3RAC3316	C1206X224K5RAC3316	C0805X104J5RAC3316
C0805X103K1RAC3316	C1210X225K5RAC3316	C0603X102K5RAC3316	C0603X103K1RAC3316
C0805X104K1RAC3316	C0805X104K5RAC3316	C0805X105K3RAC3316	C0603X104K5RAC3316
C0805X332KARAC3316	C0805X682KARAC3316	C1206X225K5RAC3316	C0603X223K5RAC3316
C0603X221K5RAC3316	C0603X473J3RAC3316	C0603X473K5RAC3316	C0603X471K5RAC3316
C0603X103K5RAC3316	C0603X333K5RAC3316	C0603X222K5RAC3316	C0603X472K5RAC3316
C0805X332K1RAC3316	C1206X104K5RAC3316	C0805X103K2RAC3316	C0603X222J5RAC3316
C0805X106M9RAC3317	C1206X475J3RAC3316	C1206X475K5RAC3317	C1206X475M4RAC3317
C1206X475J4RAC3316	C0805X106J8RAC3316	C1206X475M9RAC3317	C1206X475M5RAC3317
C1206X475M3RAC3317	C1206X475J8RAC3317	C0805X106K9RAC3316	C1206X475M3RAC3316
C1206X475M8RAC3317	C0805X106K9RAC3317	C0805X106M9RAC3316	C1206X475M4RAC3316
C1206X475K5RAC3316	C1206X475K9RAC3317	C1206X475K4RAC3316	C1206X475J3RAC3317
C0805X106J9RAC3316	C0805X106M8RAC3316	C0805X106K8RAC3317	C0805X106J9RAC3317
C1206X475K8RAC3316	C1206X475K4RAC3317	C1206X475K9RAC3316	C0805X106M8RAC3317
C1206X475K8RAC3317	C1206X475J5RAC3316	C1206X475J5RAC3317	C1206X475J9RAC3317
C1206X475K3RAC3317	C1206X475M9RAC3316	C1206X475J4RAC3317	C1206X475K3RAC3316
C1206X475J9RAC3316	C0805X106K8RAC3316	C0805X106J8RAC3317	C1206X475M5RAC3316
C1206X475M8RAC3316	C1206X475J8RAC3316		