


Features:

- R Value extension of RMCF product, values up to 10G
- E24 values
- RoHS compliant, REACH compliant, and halogen free




Electrical Specifications

Type/Code	Power Rating (W) @ 70°C	Maximum Working Voltage (V) ⁽¹⁾	Maximum Overload Voltage (V)	TCR (ppm/°C)	Ohmic Range (Ω) and Tolerance		
					1%	5%	10%
HMC0402	0.063	50	100	± 200	11M - 20M	-	
				± 400	22M - 100M		
HMC0603	0.1	50	100	± 200	11M - 20M	-	
				± 400	22M - 100M		
				± 500	-	110M - 1G	
HMC0805	0.125	150	300	± 200	11M - 20M	-	
				± 400	22M - 100M		
				± 500	-	110M - 500M	
				± 1000	-	510M - 1G	
				± 1500	-	1.2G - 10G	
HMC1206	0.25	200	400	± 200	11M - 20M	-	
				± 400	22M - 100M	30M - 100M	
				± 500	-	110M - 500M	
				± 1000	-	510M - 1G	
				± 1500	-	1.2G - 10G	
HMC1210	0.33	200	400	± 200	11M - 20M	-	11M - 20M
				± 400	22M - 100M		
HMC2010	0.75	200	400	± 200	11M - 20M		
				± 400	22M - 100M		
HMC2512	1	250	500	± 200	11M - 20M		
				± 400	22M - 100M		

(1) Lesser of $\sqrt{P \cdot R}$ or maximum working voltage.

Mechanical Specifications



Type/Code	L Body Length	W Body Width	H Body Height	a Top Termination	b Bottom Termination	Unit
HMC0402	0.039 ± 0.002	0.020 ± 0.002	0.014 ± 0.002	0.008 ± 0.004	0.008 ± 0.004	inches
	1.00 ± 0.05	0.50 ± 0.05	0.35 ± 0.05	0.20 ± 0.10	0.20 ± 0.10	mm
HMC0603	0.063 ± 0.004	0.031 ± 0.004	0.018 ± 0.004	0.012 ± 0.008	0.012 ± 0.008	inches
	1.60 ± 0.10	0.80 ± 0.10	0.45 ± 0.10	0.30 ± 0.20	0.30 ± 0.20	mm
HMC0805	0.079 ± 0.008	0.049 ± 0.004	0.020 ± 0.004	0.016 ± 0.008	0.016 ± 0.008	inches
	2.00 ± 0.20	1.25 ± 0.10	0.50 ± 0.10	0.40 ± 0.20	0.40 ± 0.20	mm

Mechanical Specifications (cont.)


Type/Code	L Body Length	W Body Width	H Body Height	a Top Termination	b Bottom Termination	Unit
HMC1206	0.122 ± 0.006 3.10 ± 0.15	0.061 ± 0.004 1.55 ± 0.10	0.022 ± 0.006 0.55 ± 0.15	0.020 ± 0.010 0.50 ± 0.25	0.020 ± 0.008 0.50 ± 0.20	inches mm
HMC1210	0.126 ± 0.008 3.20 ± 0.20	0.102 ± 0.006 2.60 ± 0.15	0.022 ± 0.004 0.55 ± 0.10	0.020 ± 0.008 0.50 ± 0.20	0.020 ± 0.008 0.50 ± 0.20	inches mm
HMC2010	0.197 ± 0.008 5.00 ± 0.20	0.098 ± 0.006 2.50 ± 0.15	0.022 ± 0.004 0.55 ± 0.10	0.024 ± 0.010 0.60 ± 0.25	0.020 ± 0.008 0.50 ± 0.20	inches mm
HMC2512	0.250 ± 0.008 6.35 ± 0.20	0.126 ± 0.006 3.20 ± 0.15	0.022 ± 0.004 0.55 ± 0.10	0.024 ± 0.010 0.60 ± 0.25	0.020 ± 0.008 0.50 ± 0.20	inches mm

Performance Characteristics


Test	Test Condition (JIS C 5202)	Test Result
Long Term Stability	Nominal temperature & humidity for 1000 hours	± 0.5%
High Temperature Loading	15 VDC, 1.5 hour ON, 0.5 hour OFF, 1000 hours 70°C	± 3%
Resistance to Solder Heat	260°C ± 5°C, 10 seconds +1/-0	± 1%
Short Time Overload	5 seconds at maximum overload voltage	± 2%

Operating temperature range is -55°C to +125°C

Power Derating Curve:

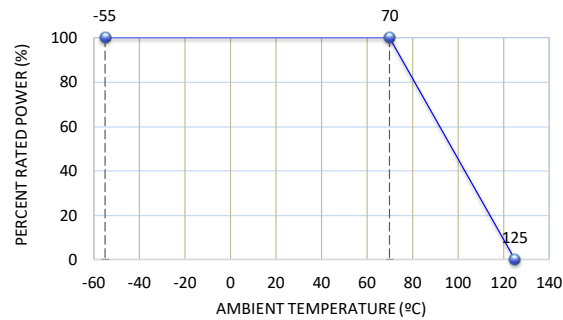

Recommended Pad Layouts



Type/Code	A	B	C	Unit
HMC0402	0.020 0.50	0.018 0.45	0.024 0.60	inches mm
HMC0603	0.035 0.90	0.024 0.60	0.035 0.90	inches mm
HMC0805	0.047 1.20	0.028 0.70	0.051 1.30	inches mm
HMC1206	0.079 2.00	0.035 0.90	0.063 1.60	inches mm
HMC1210	0.079 2.00	0.035 0.90	0.110 2.80	inches mm
HMC2010	0.150 3.80	0.035 0.90	0.110 2.80	inches mm
HMC2512	0.193 4.90	0.063 1.60	0.138 3.50	inches mm

Recommended Solder Profile

This information is intended as a reference for solder profiles for Stackpole resistive components. These profiles should be compatible with most soldering processes. These are only recommendations. Actual numbers will depend on board density, geometry, packages used, etc., especially those cells labeled with “*”.


100% Matte Tin / RoHS Compliant Terminations

Soldering iron recommended temperatures: 330°C to 350°C with minimum duration.
Maximum number of reflow cycles: 3.


Wave Soldering			
Description	Maximum	Recommended	Minimum
Preheat Time	80 seconds	70 seconds	60 seconds
Temperature Diff.	140°C	120°C	100°C
Solder Temp.	260°C	250°C	240°C
Dwell Time at Max	10 seconds	5 seconds	*
Ramp DN (°C/sec)	N/A	N/A	N/A

Temperature Diff. = Difference between final preheat stage and soldering stage.

Convection IR Reflow			
Description	Maximum	Recommended	Minimum
Ramp Up (°C/sec)	3°C/sec	2°C/sec	*
Dwell Time > 217°C	150 seconds	90 seconds	60 seconds
Solder Temp.	260°C	245°C	*
Dwell Time at Max.	30 seconds	15 seconds	10 seconds
Ramp DN (°C/sec)	6°C/sec	3°C/sec	*

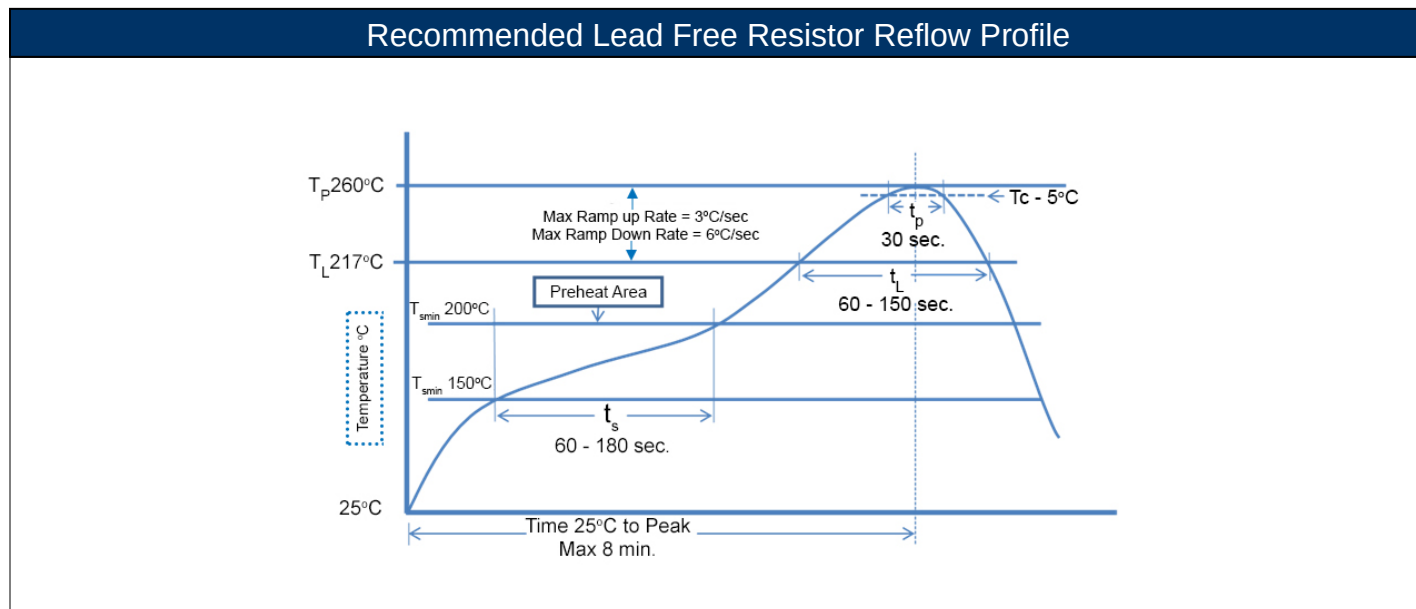


Reel Specifications




Reel Type	Wa	M	A	B	C	D	Unit
7" reel for 8 mm tape	0.354 ± 0.020 9.00 ± 0.50	7.008 ± 0.079 178.00 ± 2.00	0.079 ± 0.020 2.00 ± 0.50	0.531 ± 0.020 13.50 ± 0.50	0.827 ± 0.020 21.00 ± 0.50	2.362 ± 0.039 60.00 ± 1.00	inches mm

Packaging Specifications – Paper Tape

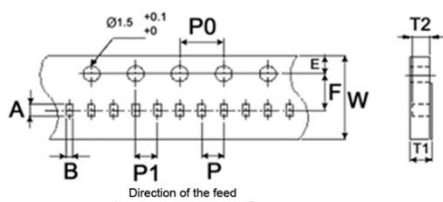

Type/Code	Nominal Typical Full Reel Weight (g)	Tape Width	A	B	W	E	F	T1	T2	P	P0	P1	Unit
HMC0402	94.5	0.315 8.00	0.047 ± 0.006 1.20 ± 0.15	0.028 ± 0.006 0.70 ± 0.15	0.315 ± 0.008 8.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.138 ± 0.002 3.50 ± 0.05	0.016 ± 0.008 0.40 ± 0.20	0.016 ± 0.002 0.40 ± 0.05	0.079 ± 0.004 2.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	inches mm
HMC0603	118.3		0.071 ± 0.008 1.80 ± 0.20	0.041 ± 0.008 1.05 ± 0.20				0.024 ± 0.008 0.60 ± 0.20	0.024 ± 0.004 0.60 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	inches mm
HMC0805	139.2		0.093 ± 0.010 2.35 ± 0.25	0.063 ± 0.010 1.60 ± 0.25				0.030 ± 0.008 0.75 ± 0.20	0.030 ± 0.004 0.75 ± 0.10				inches mm
HMC1206	151.4		0.140 ± 0.010 3.55 ± 0.25	0.077 ± 0.010 1.95 ± 0.25				0.030 ± 0.008 0.75 ± 0.20	0.030 ± 0.004 0.75 ± 0.10				inches mm
HMC1210	175.7		0.138 ± 0.008 3.50 ± 0.20	0.110 ± 0.010 2.80 ± 0.25				0.030 ± 0.008 0.75 ± 0.20	0.030 ± 0.004 0.75 ± 0.10				inches mm

Packaging Specifications – Plastic Tape

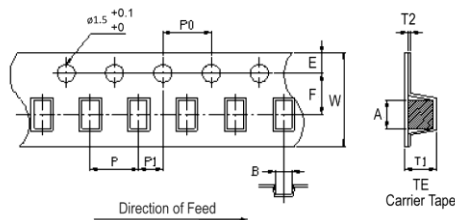


Type/Code	Nominal Typical Full Reel Weight (g)	Tape Width	A	B	W	E	F	T1	T2	P	P0	P1	Unit
HMC2010	183.1	0.472	0.217 ± 0.012 5.50 ± 0.30	0.110 ± 0.008 2.80 ± 0.20	0.472 ± 0.008 12.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.041 ± 0.008 1.05 ± 0.20	0.009 ± 0.006 0.23 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	inches mm
HMC2512	255.3	12.00	0.264 ± 0.008 6.70 ± 0.20	0.134 ± 0.008 3.40 ± 0.20	0.472 ± 0.008 12.00 ± 0.20	0.069 ± 0.004 1.75 ± 0.10	0.217 ± 0.002 5.50 ± 0.05	0.041 ± 0.008 1.05 ± 0.20	0.009 ± 0.006 0.23 ± 0.15	0.157 ± 0.004 4.00 ± 0.10	0.157 ± 0.004 4.00 ± 0.10	0.079 ± 0.002 2.00 ± 0.05	inches mm

Part Marking Instructions


E24 Values for 0603 - 2512

The nominal resistance is marked on the surface of the overcoating with the use of **three character markings**.

1. First and second digits are E24 code; third digit is the multiplier
2. 0402 size is unmarked



11 MΩ



470 MΩ

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status

Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
HMC	High Resistance Thick Film Chip Resistor	SMD	YES(1)	100% Matte Sn over Ni	Jan-04	04/01

Note (1): RoHS Compliant by means of exemption 7c-1.

"Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to "REACH"

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order

H	M	C	0	8	0	5	F	T	4	7	M	0
---	---	---	---	---	---	---	---	---	---	---	---	---

Product Series		Size		Tolerance			Packaging				Resistance Value
Code	Description	Code	W	Code	Tol	Value	Code	Description	Size	Quantity	
HMC	High Resistance Thick Film	0402	0.063	F	1%	E24	T	7" Reel Paper Tape	0402	10000	Four characters with the multiplier used as the decimal holder.
		0603	0.1	J	5%				0603, 0805 1206, 1210	5000	
		0805	0.125	K	10%		T	7" Reel Plastic Tape	2010	4000	30 Mohm = 30M0 100 Mohm = 100M 1.2 Gohm = 1G20
		1206	0.25						2512		
		1210	0.33								
		2010	0.75								
		2512	1								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SEI Stackpole:](#)

<u>HMC0805JT50M0</u>	<u>HMC0402JT100M</u>	<u>HMC1206JT50M0</u>	<u>HMC1206JT500M</u>	<u>HMC0402JT50M0</u>	<u>HMC0603JT100M</u>
<u>HMC0805JT500M</u>	<u>HMC0402JT30M0</u>	<u>HMC0805JT100M</u>	<u>HMC0603JT50M0</u>	<u>HMC1206JT100M</u>	<u>HMC0402FT100M</u>
<u>HMC0603JT51M0</u>	<u>HMC0805JT27M0</u>	<u>HMC0805JT75M0</u>	<u>HMC2010JT27M0</u>	<u>HMC2512JT68M0</u>	<u>HMC2512JT75M0</u>
<u>HMC0402JT62M0</u>	<u>HMC0603JT200M</u>	<u>HMC0603JT91M0</u>	<u>HMC0805JT33M0</u>	<u>HMC0805KT1G20</u>	<u>HMC1206JT160M</u>
<u>HMC2010JT47M0</u>	<u>HMC2010JT82M0</u>	<u>HMC2512JT24M0</u>	<u>HMC0805JT43M0</u>	<u>HMC0805JT47M0</u>	<u>HMC0805KT75M0</u>
<u>HMC1206JT62M0</u>	<u>HMC1210JT100M</u>	<u>HMC1210JT82M0</u>	<u>HMC0603JT470M</u>	<u>HMC0805JT250M</u>	<u>HMC0805JT82M0</u>
<u>HMC1206KT150M</u>	<u>HMC1206KT1G00</u>	<u>HMC1210JT47M0</u>	<u>HMC2010JT24M0</u>	<u>HMC0402FT20M0</u>	<u>HMC0402FT22M0</u>
<u>HMC0402JT91M0</u>	<u>HMC0805JT24M0</u>	<u>HMC0805JT91M0</u>	<u>HMC2010JT33M0</u>	<u>HMC2512JT100M</u>	<u>HMC0402JT24M0</u>
<u>HMC0402JT51M0</u>	<u>HMC0603KT68M0</u>	<u>HMC0805JT390M</u>	<u>HMC0805JT5G00</u>	<u>HMC1206JT20M0</u>	<u>HMC2010JT68M0</u>
<u>HMC0402KT50M0</u>	<u>HMC0603JT75M0</u>	<u>HMC0805KT100M</u>	<u>HMC1206JT36M0</u>	<u>HMC1206KT50M0</u>	<u>HMC1210JT50M0</u>
<u>HMC2010JT20M0</u>	<u>HMC2010JT39M0</u>	<u>HMC2512JT51M0</u>	<u>HMC2512KT100M</u>	<u>HMC0603FT100M</u>	<u>HMC0805FT20M0</u>
<u>HMC0805JT36M0</u>	<u>HMC0805KT82M0</u>	<u>HMC1210JT62M0</u>	<u>HMC2010JT91M0</u>	<u>HMC0402FT49M9</u>	<u>HMC0402JT22M0</u>
<u>HMC0603JT33M0</u>	<u>HMC0805JT56M0</u>	<u>HMC0805JT62M0</u>	<u>HMC1206KT510M</u>	<u>HMC1210KT100M</u>	<u>HMC2010JT100M</u>
<u>HMC2512JT50M0</u>	<u>HMC2512JT56M0</u>	<u>HMC0402FT30M0</u>	<u>HMC0805JT22M0</u>	<u>HMC1206KT10G0</u>	<u>HMC1206KT200M</u>
<u>HMC2010KT100M</u>	<u>HMC0603JT22M0</u>	<u>HMC0603JT27M0</u>	<u>HMC0603KT100M</u>	<u>HMC0603KT4G70</u>	<u>HMC0805KT47M0</u>
<u>HMC1206JT51M0</u>	<u>HMC1210JT22M0</u>	<u>HMC2010JT56M0</u>	<u>HMC0402JT27M0</u>	<u>HMC0402JT36M0</u>	<u>HMC1210JT68M0</u>
<u>HMC2010JT50M0</u>	<u>HMC2512JT36M0</u>	<u>HMC2512JT43M0</u>	<u>HMC0402JT82M0</u>		