

1.Nominal voltage: 300V/16A
PITCH:5.08mm

2.Connection capacity:
AWG 26-14

3. Insulation Withstanding Voltage:
AC 1600V/MIN

4. Insulation Resistance:
1000M Ω or more at DC500V

5. Tightening torque:
4.0kqf.cm (0.4N.m)

6.Screw thread: M3

7.Stripping length: 6-7mm

8. Operating temperature range: $-40^{\circ}\text{C} \sim 115^{\circ}\text{C}$
Soldering temperature: $250 \pm 10^{\circ}\text{C} / 5\text{s}$

9.Undimensioned Tolerances:

	Dim L = P×5,08 Dim.B = (P-1)×5,08 P = number of poles(2-24p)	Dim L
0-30mm	±0.15	±0.20
over 30mm-60mm	±0.20	±0.25
over 60mm-90mm	±0.25	±0.30
over 90mm	±0.30	±0.40

10. Safety approval: 

11. RoHS Compliance

Part No.:

OSTTAXX4163

No. of Poles	COLOR
02 2 Poles	0: Black
03 3 Poles	2: Red
...	3: Orange
24 24 Poles	4: Yellow

COLOR

0: Black

2: Red

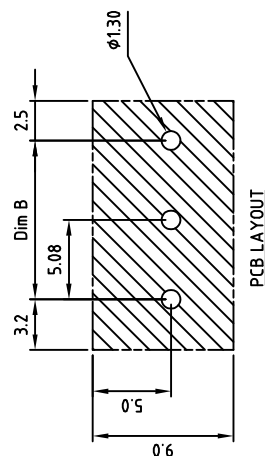

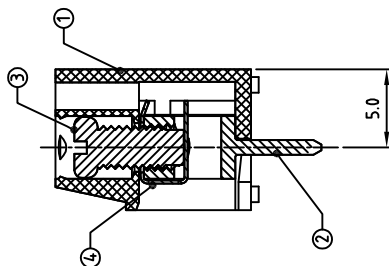
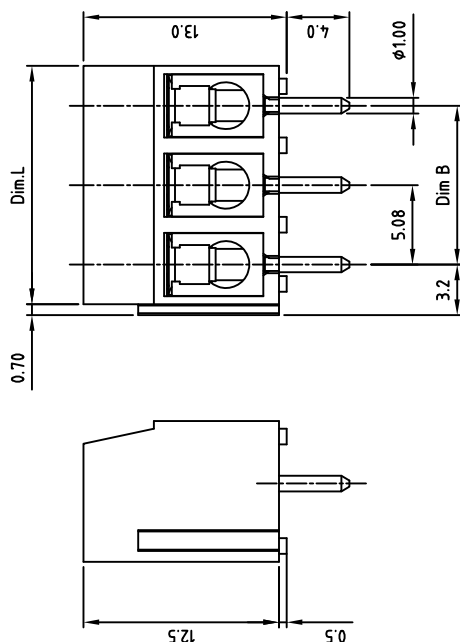

3: Orange

4: Yellow

5: Green

6: Blue (Standard)
8: Grey

Nonstandard colors
Mins could apply

[illegible]

DATE	CHK	DESCRIPTION	SIGN
			△