

## Chip Resistor &gt; RC3216

## RC3216J000CS

General

Typical

Discrete

RoHS


REACH

## ※ Precautions for Power Derating Curve &amp; Rated Voltage

- For ambient temperature above 70°C, the loading power follows the power derating curve.
- Rated Voltage or Max. working voltage, whichever is lower.
- Parts require technical consultation before adopting them.

## Size

Size Code	1206 (3216)	* inch(mm)
L Size	3.2 ± 0.15mm	
W Size	1.6 ± 0.15mm	
T Size	0.55mm typ.	

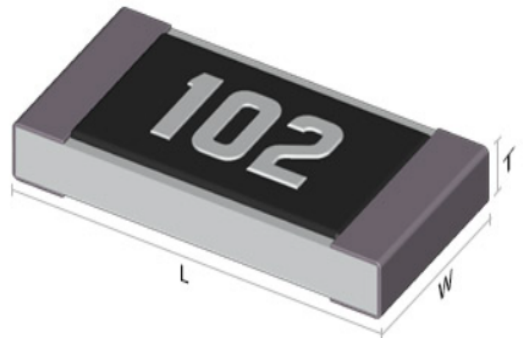

## Characteristics

R Value	0.0Ω
Tolerance	0.05ohm Max %
Rated Power	1/4W(2.0A)
Rated Voltage	0.0Vdc



Any data in this page are subject to change, modify or discontinue without notice.

This page includes the typical data for design reference only.

If there is any question regarding the data, please contact our sales personnel or application engineers.