

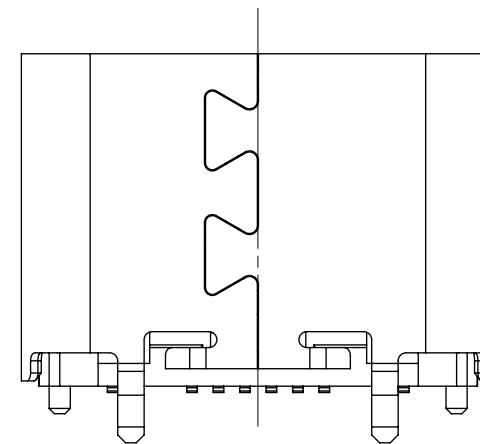
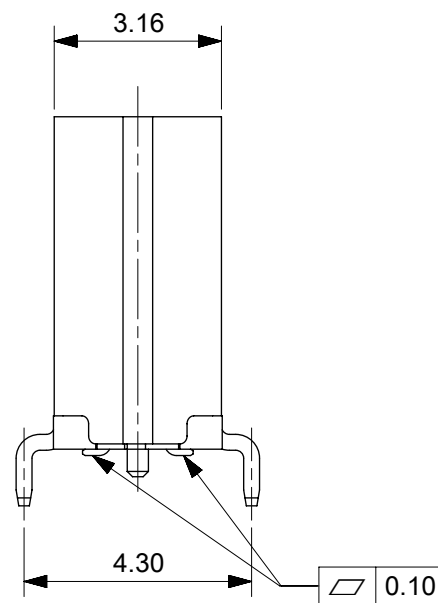
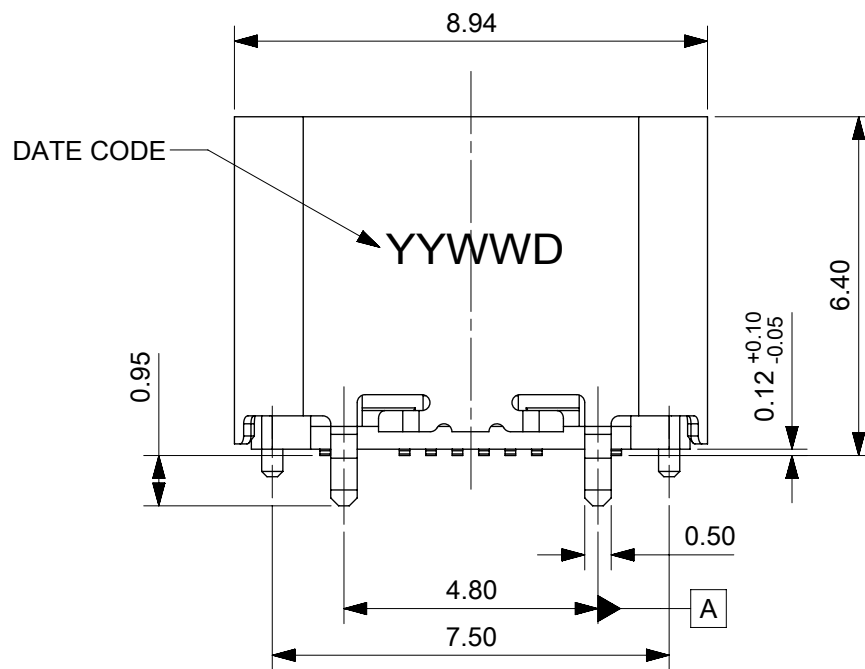
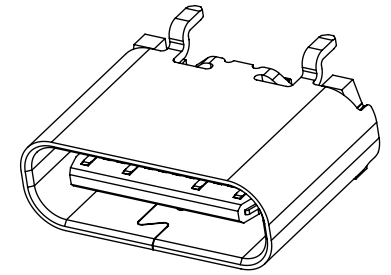
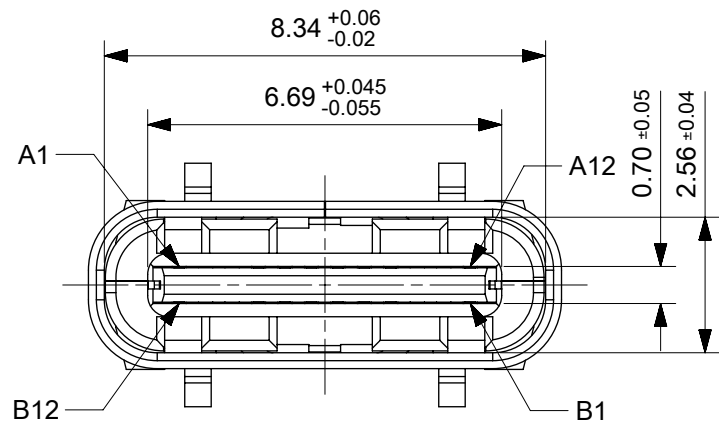


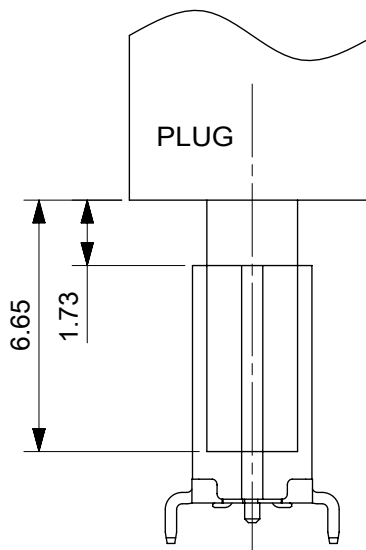


USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

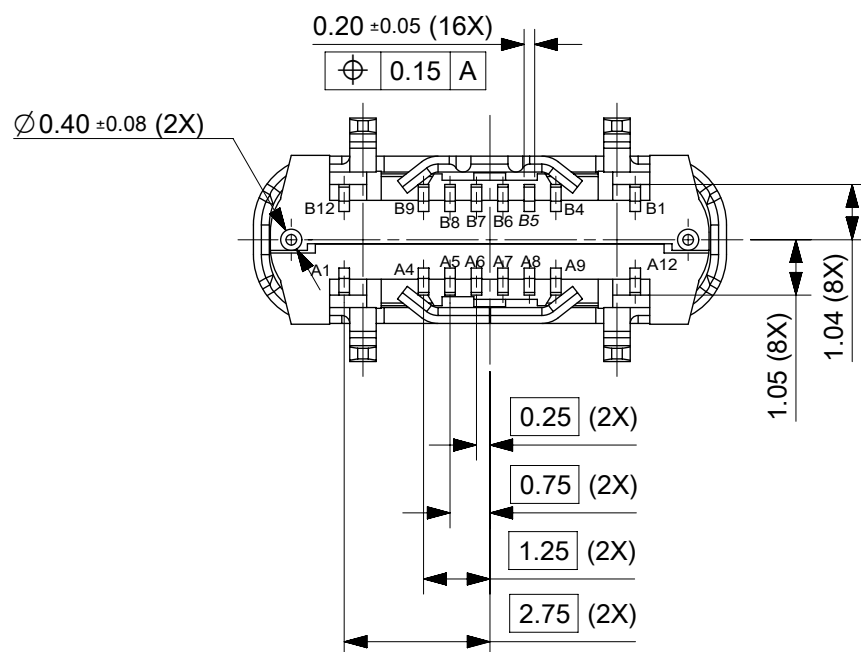

FEMALE AND MALE MATCHING DRAWING

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: PCB PIN DEFINITION CORRECTION ERROR							
mm		1:1									
GENERAL TOLERANCES (UNLESS SPECIFIED)				molex TYPE C 16 PIN VERTICAL SMT L=6.4							
ANGULAR TOL ± 3.0°											
4 PLACES		±		EC NO: 740234		2023/02/20					
3 PLACES		± 0.1		DRWN: DARIEY		2023/03/17					
2 PLACES		± 0.2		CHK'D: RLI09		2023/03/17					
1 PLACE		± 0.3		APPR: RLI09		2023/03/17					
0 PLACES		±		PRODUCT CUSTOMER DRAWING							
INITIAL REVISION:											
DRWN: RZHANG				2021/01/29		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
APPR: AYIN				2021/02/05		2171820001		PSD	000	B	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER	SHEET NUMBER
				A3-SIZE		217182		2171820001			1 OF 2

NOTES:

1.MATERIAL SPECIFICATION:

1.1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.

1.2.CONTACTS:COPPER ALLOY

1.3.MIDDLE CLIP: STAINLESS STEEL

1.4.SHELL: STAINLESS STEEL

2.PLATING:

2.1 TERMINAL:OVERALL PLATING Ni BASE 50u' MIN.

FUNCTIONAL AREA Au PLATING G/F

SOLDER AREA Au PLATING G/F

2.2. SHELL: 50u' NICKEL PLATING ON SOLDERING AREA.

2.3. MIDDLE CLIP :CLEANING

3. PRODUCT SPEC: 2169900001




4. PACKAGE SPEC:2171820001PDDPK1

5. PRODUCT COMPLIANT TO RIHS DIRECTIVE 2011/95/EU


6. PLEASE CONTACT YOUR SALES REPRESENTATIVE IF INTENDED FOR AUTOMOTIVE

7. DATE CODE: YY WW D

YEAR WEEK DAY

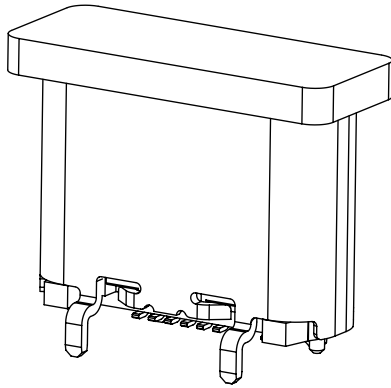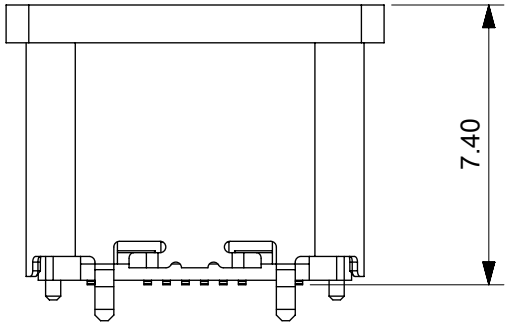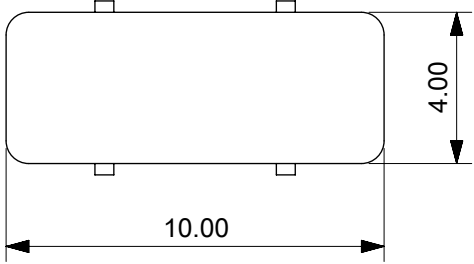

CAP assembly diagram

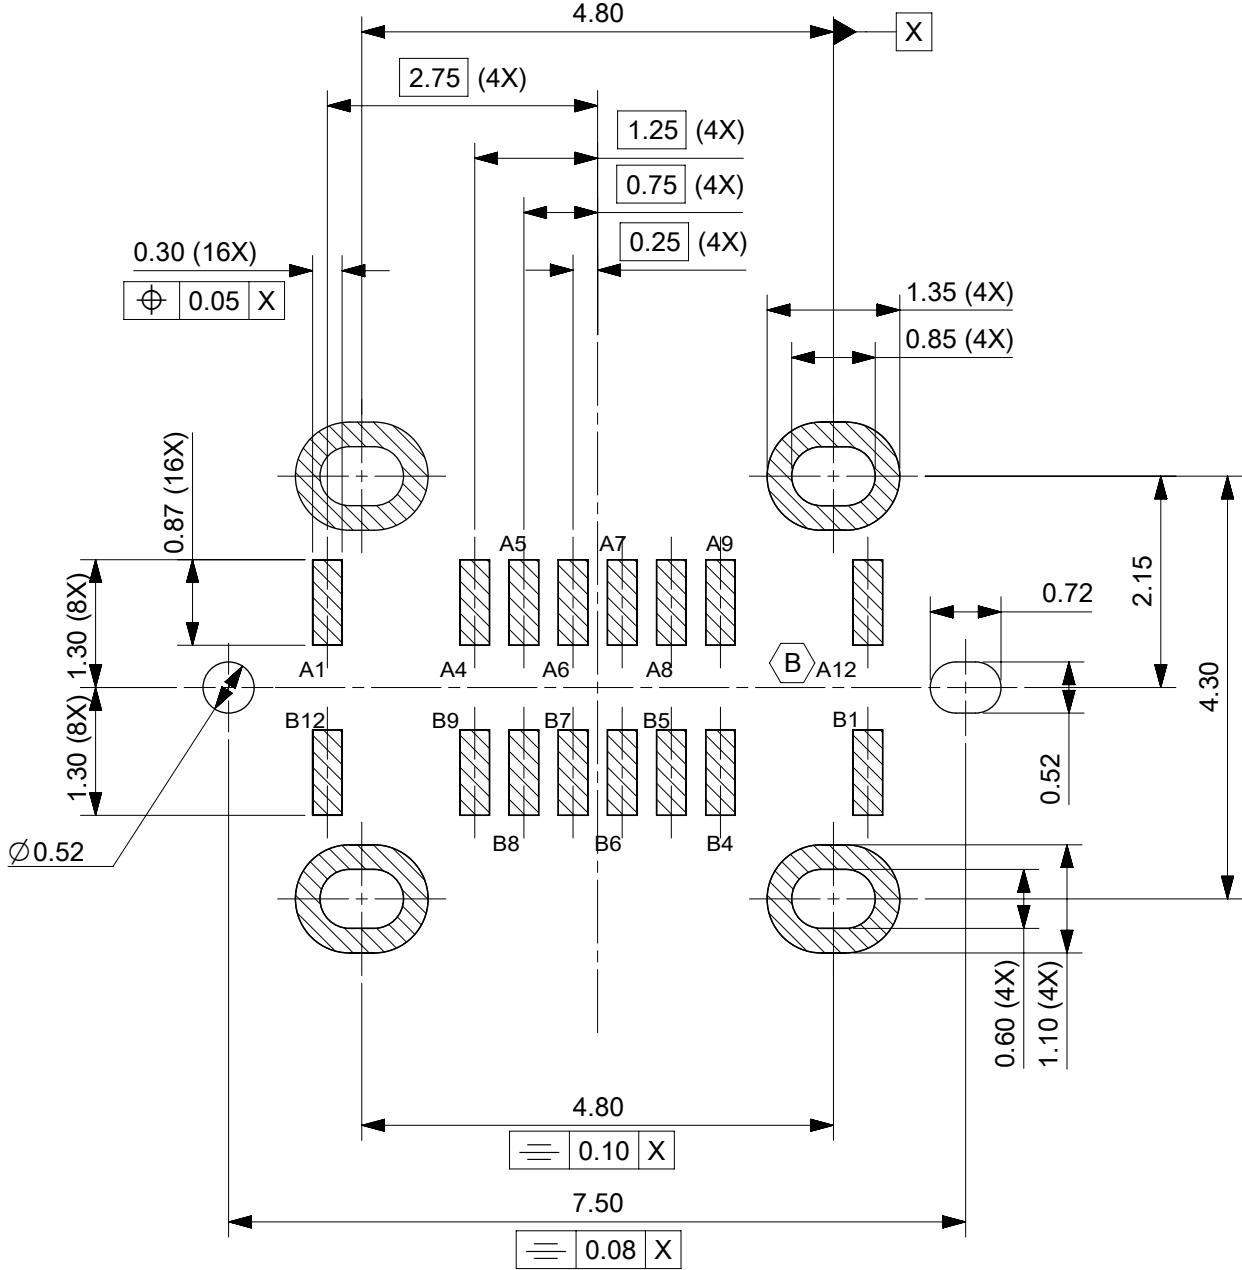

RECOMMENDED PCB LAYOUT (TOP VIEW)
THICKNESS IS 0.8MM, DEFULT TOLERANCE IS ±0.05

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION												
DIMENSION UNITS		SCALE	CURRENT REV DESC: PCB PIN DEFINITION CORRECTION ERROR				molex					
mm		1:1										
GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 740234 DRWN: DARIEY 2023/02/20 CHK'D: RLI09 2023/03/17 APPR: RLI09 2023/03/17				TYPE C 16 PIN VERTICAL SMT L=6.4					
ANGULAR TOL ± 3.0 °							PRODUCT CUSTOMER DRAWING					
4 PLACES		±					DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
3 PLACES		± 0.1					2171820001		PSD	000	B	
2 PLACES		± 0.2					INITIAL REVISION: DRWN: RZHANG 2021/01/29 APPR: AYIN 2021/02/05		SHEET NUMBER		2 OF 2	
1 PLACE		± 0.3										
0 PLACES		±										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER		
				A3-SIZE	217182	2171820001						